



## Yuasa Ficha Técnica

### Yuasa HJ-S46B24R

#### Rendimiento

|                                   |      |
|-----------------------------------|------|
| Tensión                           | 12V  |
| Capacidad (20 horas)              | 45Ah |
| Capacidad Arranque Amperios (EN1) | 325A |

#### Dimensiones

|       |       |
|-------|-------|
| Largo | 238mm |
| Ancho | 129mm |
| Alto  | 227mm |

#### Peso

|                |        |
|----------------|--------|
| Peso con Acido | 11.5kg |
|----------------|--------|



#### Características


|                              |             |
|------------------------------|-------------|
| Tipo de Caja                 | B24 JIS AGM |
| Borne                        | 1           |
| Fijación                     | N           |
| Asas                         | ✓           |
| Características Semitraccion | ✓           |
| Sellada                      | VRLA        |

#### Tecnología


|                     |                  |
|---------------------|------------------|
| Regulador gases     | ✓                |
| Tecnología          | Ca/Ca VRLA       |
| Separadores         | AGM              |
| Vibración           | V1 (30Hz/3g/2hr) |
| Carga recomendada   | 3A               |
| Performance Marking | W5-C2-V2-E2      |

#### Tipo de terminal

**T3**  
Small Japanese  
JIS Terminal



#### Esquema

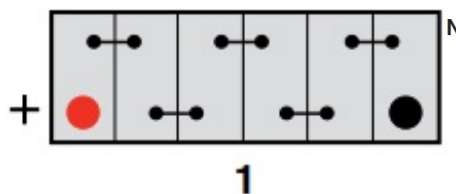

#### Fijación



Fecha de emisión: 17/04/2020 - E&EO



## Yuasa Technical Data Sheet

### Yuasa HJ-S46B24R

#### Performance

|                          |      |
|--------------------------|------|
| Voltage                  | 12V  |
| Capacity (20-hour)       | 45Ah |
| Cold Cranking Amps (EN1) | 325A |

#### Dimensions

|        |       |
|--------|-------|
| Length | 238mm |
| Width  | 129mm |
| Height | 227mm |

#### Weights & Measures

|                       |        |
|-----------------------|--------|
| Mean Weight with Acid | 11.5kg |
|-----------------------|--------|



#### Container Features


|                        |             |
|------------------------|-------------|
| Case Type              | B24 JIS AGM |
| Cell Layout            | 1           |
| Hold Down              | N           |
| Handles                | ✓           |
| Semi-Traction Features | ✓           |
| Lid Type               | VRLA        |

#### Technology


|                         |                  |
|-------------------------|------------------|
| Flame Arrestor          | ✓                |
| Technology              | Ca/Ca VRLA       |
| Separator               | AGM              |
| Vibration               | V1 (30Hz/3g/2hr) |
| Recommended Charge Rate | 3A               |
| Performance Marking     | W5-C2-V2-E2      |

#### Terminal Type

**T3**  
Small Japanese  
JIS Terminal



#### Cell Assembly Layout

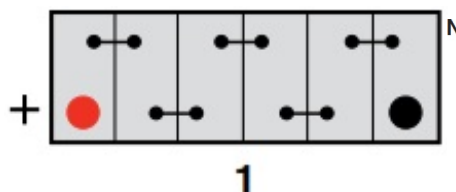

#### Battery Hold-down



Data Sheet generated on 17/04/2020 - E&OE